DELPHI SYSTEMS CORP.

CORRECTIVE MEASURES PROPOSAL

FIGURE 9

CONCRETE ANALYTICAL RESULTS FOR PCBs AND ARSENIC AND ESTIMATED AREAS FOR OFFSITE DISPOSAL

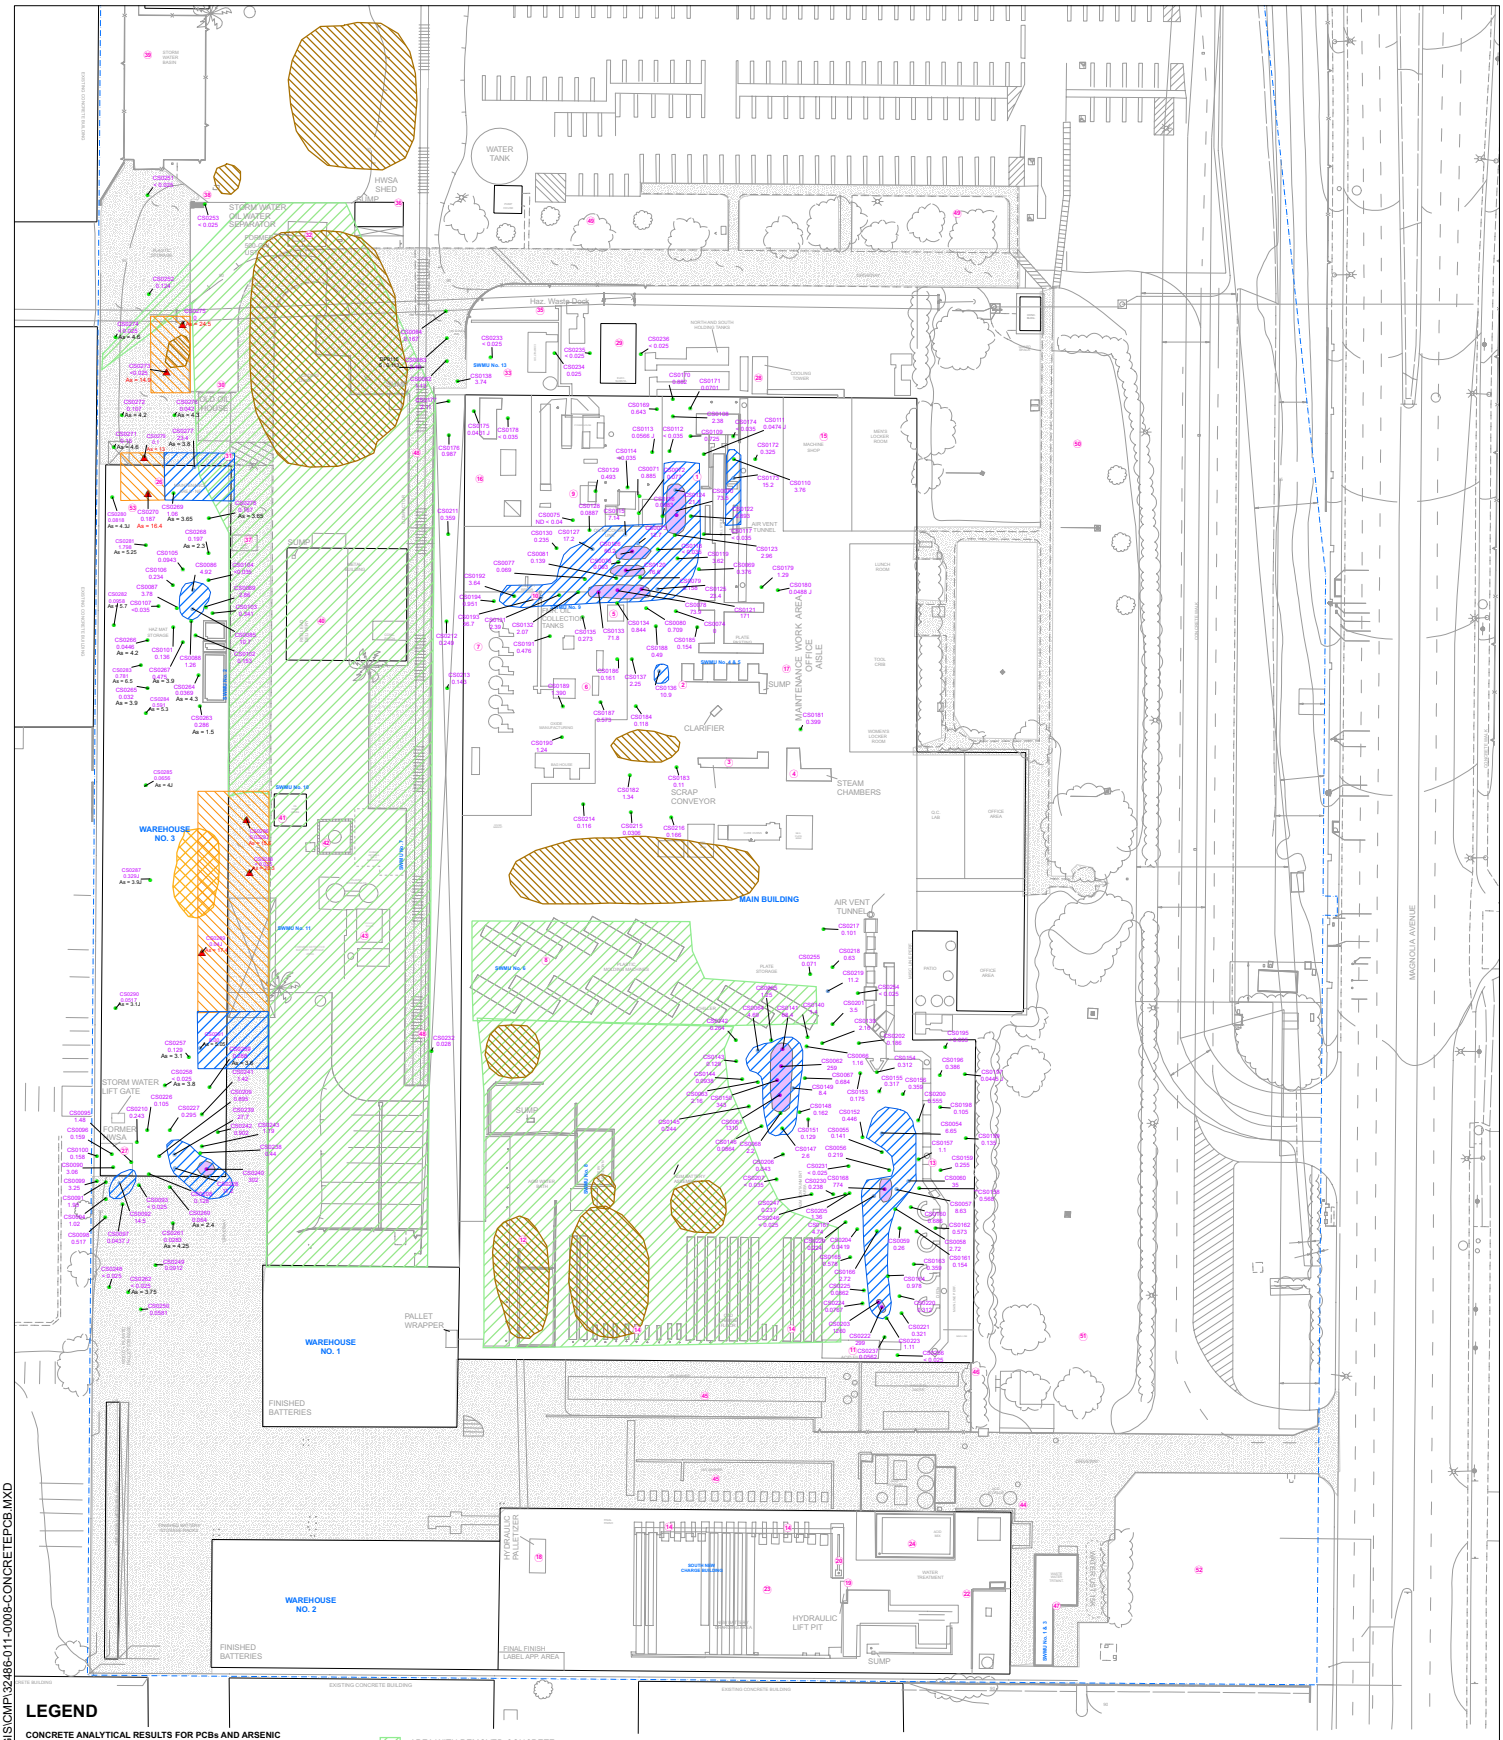

LEGEND

CONCRETE ANALYTICAL RESULTS FOR PCBs AND ARSENIC

- PCBs < 3.82 MG/KG REMEDIATION CRITERIA
- PCBs > 3.82 AND <= 49.99 MG/KG
- PCBs > 50 AND <= 4999.99 MG/KG
- PCBs > 5000 MG/KG
- As = ARSENIC > 9.05 MG/KG REMEDIATION CRITERIA
- As = ARSENIC < 9.05 mg/kg REMEDIATION CRITERIA

PCB AND ARSENIC IMPACTED AREAS

- ≥ 3.82 MG/KG APPROXIMATE LIMIT OF CONCRETE WITH CONCENTRATIONS OF PCBs GREATER THAN RISK-BASED REMEDIATION CRITERIA OF 3.82 MG/KG
- ARSENIC CONCENTRATION GREATER THAN RISK-BASED REMEDIATION CRITERIA OF 9.05 MG/KG BUT LESS THAN HAZARDOUS CALIFORNIA TOTAL TRESHOLD LIMIT CONCENTRATION (TTLC) WASTE CONCENTRATION OF 500 MG/KG NOTE: NO SAMPLES EXCEEDED TTLC LEVEL OF 500 MG/KG
- APPROXIMATE LIMIT OF CONCRETE WITH CONCENTRATIONS OF PCBs GREATER THAN OR EQUAL TO TSCA TTLC CONCENTRATION OF 50 MG/KG

- AREA WITH REMOVED CONCRETE
- EXISTING BRICK OR CONCRETE RUBBLE STOCKPILE
- EXISTING SOIL STOCKPILE
- BUILDING OUTLINE
- PROPERTY LINE
- 53 AREAS OF INTEREST

SWMU SOILD WASTE MANAGEMENT UNIT

CS0200 555J *J" INDICATES ANALYTE WAS DETECTED. HOWEVER, ANALYTE CONCENTRATION IS AN ESTIMATED VALUE WHICH IS GREATER THAN THE METHOD DETECTION LIMIT (MDL) AND LESS THAN THE PRACTICAL QUANTITATION LIMIT(PQL).

ALL REPORTED PCB CONCENTRATIONS ARE TOTAL PCB CONCENTRATIONS

N W E S

0 30 60 120
SCALE IN FEET

HALEY & ALDRICH

DELPHI CORPORATION
FORMER BATTERY OPERATIONS, 1201 N. MAGNOLIA
ANAHEIM, CALIFORNIA
32486-011

CONCRETE ANALYTICAL RESULTS FOR PCBs AND ARSENIC AND ESTIMATED AREAS FOR OFFSITE DISPOSAL

SCALE: AS SHOWN
AUGUST 2007

FIGURE 9

G:\CLIENTS & PROJECTS\Delphi\Anaheim\Figures\GIS\CMP\32486-011-0008-CONCRETEPCB.MXD